



Motor-driven saddle height adjustment with height indication



Automatic blood pressure measurement



Oxygen saturation measurement (SpO2)

Technical data

Ergometer	ergoselect 200 P
Brake system	microprocessor controlled eddy current brake
Load	6 - 999 Watt, speed independent
Accuracy	according to DIN VDE 0750-238
Speed range	30 - 130 rpm
Handlebar adjustment	inclination: 360° / height: 90-126 cm
Saddle height adjustment	continuous, motor-driven
Patient weight (max.)	160 kg / 200 kg with anti-tip protection plate (option)
Control unit	
Display / patient display	load, rpm, speed, time, blood pressure, heart rate (LCD) / rpm (LED)
Keyboard	membrane keyboadr
Graphic display (load, heart rate)	○ (type K)
Exercise protocols	
User programmable	10
Fixed incremental protocols (WHO, Hollmann, etc.)	5
Manual load adjustment	●
Training protocols	
Pulse-controlled training (integrated HR receiver)	○ (type K)
Predefined performance tests	○ (type K)
Options	
Automatic blood pressure measurement	○
Oxygen saturation measurement	○
Pediatric ergometry / diagnostic tests for athletes	○
Interfaces	
Digital (RS-232, USB) / analog / remote start	● / ○ / ○
Miscellaneous	
Dimensions, max. (L x W x H)	approx. 90 cm x 46 cm x 133 cm
Weight	64 kg
Power	100-240 V / 50-60 Hz / 50 VA max.

● Standard ○ Option

ergoselect 200



Bicycle ergometer

practice oriented

The ergometer can be upgraded with automatic blood pressure measurement which provides precise measuring values - even at high loads.

For monitoring of oxygen saturation during exercise tests, the ergometer can be equipped with an SpO2 module.

With two different control terminals, one for exercise tests and one for training / rehabilitation, you are optimally prepared for the different applications.

Convenient stand-alone operation with custom-defined exercise and training protocols as well as the universal connection to all types of ECG recorders or PC-based ECG systems is possible.

competent

The digital interfaces (RS232, USB) are electrically isolated - all ports can be found in safe locations under the ergometer.

The rugged mechanical construction guarantees outstanding safety and trouble-free operation, even when the ergometer is permanently in use and has to withstand high loads.

All ergoline ergometers are produced with only high quality components and, of course, satisfy all applicable standards and requirements for medical grade crank ergometers.

A network of authorized, ergoline-trained service engineers is available in your country for repairs or other service interventions (such as inspections of the measuring system).

ergoline

ergoline GmbH
Lindenstrasse 5
D-72475 Bitz
Germany

Tel.: +49-(0)-7431 - 9894 - 0
Fax: +49-(0)-7431 - 9894 - 128
email: info@ergoline.com
internet: www.ergoline.com

Autorizovaný obchodní a servisní partner:



COMPEK MEDICAL SERVICES, s.r.o.
17. listopadu 861, 506 01 Jičín
mobil: +420 605 281 433
tel/fax: +420 493 524 534
e-mail: info@compek.cz
internet: www.compek.cz

COMPEK MEDICAL SERVICES, s.r.o.
Strážna 11, 831 01 Bratislava
mobil: +421 908 758 793
fax: +421 2 3301 6145
e-mail: info@compek.sk
internet: www.compek.sk

Development and production of all ergoline products are subject to a certified quality management system according to DIN EN ISO 13485:2003. All products are CE-marked and fulfill the requirements of the Medical Device Directive 93/42/EEC.

Some of the illustrations in this brochure show options which must be purchased separately. The information provided is based on data valid at the date of printing. Subject to modifications.

ergoline



Different control units (P and K)



Continuously adjustable handlebar (angle)



Continuously adjustable handlebar (height)



designed for patient comfort

With these ergometers, the seat height can be electrically adjusted. This allows even elderly patients or people with lower extremity impairment to mount the ergometer without any problems.


By means of the dual adjustment capability for the handlebar (height and angle) the ideal position of the upper body and the angle that the legs form with the cranks can always be optimally adjusted. Special add-ons, such as saddle adjustment and variable cranks, allow the ergometer to be used for testing the physical performance of athletes and for pediatric exercise tests.



ergoselect 200 with triathlon handlebar and equipped for athletic training



ergoselect 200 as pediatric ergometer

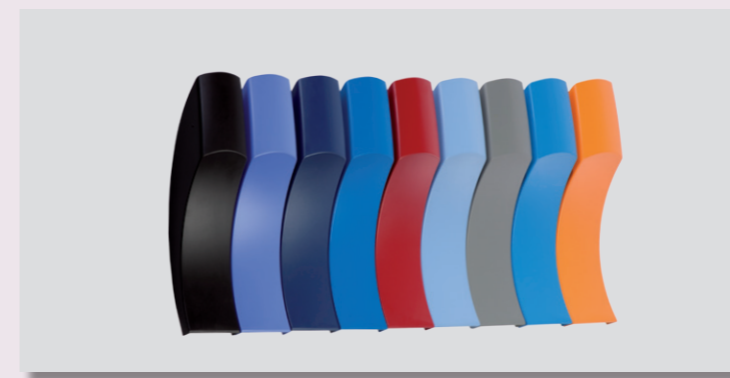

Ergometer covers in different colors

Horizontal saddle adjustment



Adjustable crank arms



Digital chest belt for heart rate measurement



Training chip card



Patient weight up to 200 kg



Basket



ergoselect 200

ergoline's high-end ergometer will impress you with its unrivalled modular upgradability:

It covers all your needs from a powerful ergometer for exercise ECGs and assessment of physical performance to a stand-alone system for pulse-controlled training sessions - integrating a whole range of different modules offers you an outstanding degree of flexibility in configuring ergometers for your special requirements.

For years leading ECG manufacturers have been integrating our ergometers in their exercise test systems - more than 50,000 ergoline ergometers are in use today in office practices, hospitals, medical sports centers and rehabilitation facilities around the world.