


VALIANT PEDIATRIC

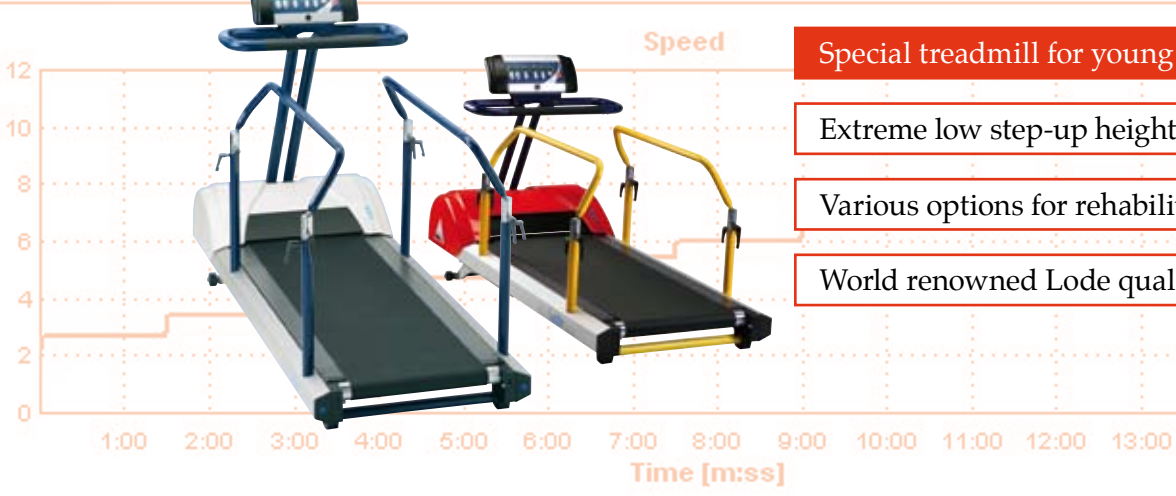

Special treadmill for young children

Extreme low step-up height

Various options for rehabilitation

World renowned Lode quality and accuracy



LODE TREADMILL
**VALIANT
PEDIATRIC**
VALIANT
VALIANT PLUS
**OTHER
LODE PRODUCTS**

CORIVAL ERGOMETERS

EXCALIBUR SPORT ERGOMETERS

ANGIO ARM ERGOMETERS

ANGIO IMAGING ERGOMETERS

MRI ERGOMETERS

CALIBRATOR

n/a = not applicable

changes without prior notice

Standard speed range	0,1 – 12 km/h 0.1 – 7.5 mph	0,5 – 20 km/h 0.3 – 12 mph	1 – 25 km/h 0.6 – 15.6 mph
Speed adjustment steps	0,1 km/h	0,1 km/h	0,1 km/h
Elevation	0 – 25%	0 – 25%	0 – 25 %
Angle adjustment steps	1%	1%	1%
Walking surface	50 x 127 cm	50 x 150 cm	60 x 170 cm
Maximum patient weight	160 kg	160 kg	160 kg
Power requirements	230 VAC, 50-60 Hz. 115 VAC, 50-60 Hz. (2 phases)	230 VAC, 50-60 Hz. 115 VAC, 50-60 Hz. (2 phases)	230 VAC, 50-60 Hz. 115 VAC, 50-60 Hz. (2 phases)
Motor	1,8 kW	1,8 kW	1,8 kW
Interface	RS232	RS232	RS232
Dimensions (L x B x H), cm	190 x 90 x 135	213 x 90 x 135	233 x 102 x 135
Weight	135 kg	149 kg	170 kg
Environmental conditions			
<i>Operational:</i>			
- temperature °C (°F)	14 – 40 (57 – 104)	14 – 40 (57 – 104)	14 – 40 (57 – 104)
- humidity (non-condensing) %	30 – 90	30 – 90	30 – 90
- air pressure kPa	70 – 106	70 – 106	70 – 106
<i>Storage:</i>			
- temperature °C (°F)	-25 – 70 (13 – 167)	-25 – 70 (13 – 167)	-25 – 70 (13 – 167)
- humidity (non-condensing) %	10 – 95	10 – 95	10 – 95
- air pressure kPa	50 – 106	50 – 106	50 – 106
Safety / emergency stop			
- Magnetic lanyard	Standard	Standard	Standard
- Stop button	Optional	Optional	Optional
Rehab speed (0,1 – 12 km/h)	Standard	Optional	n/a
Standard speed (0,5 – 20 km/h)	Optional	standard	n/a
Heart rate	Optional	Optional	Optional
Rear elevation			
- Mechanically -10 – 0%	Optional	Optional	Optional
- Electrically -10 – 0%	Optional	Optional	Optional
Entrance plate	Optional	Optional	Optional
Anti-slip strips	Optional	Optional	Optional
Side handrails fixed (height: 850 mm)	n/a	Optional	Optional
Side handrails adjustable: Height: 791 – 954 mm Width: 440 – 975 mm	n/a	Optional	Optional
Pediatric front handrail	n/a	Optional	Optional
Adjustable pediatric side handrails: Height: 600 – 763 mm Width: 440 – 975 mm	Optional	Optional	Optional
Arm support	Optional	Optional	Optional
Wider / Longer running surface	n/a	Optional	Optional
Safety belt and fall-stop	Optional	Optional	Optional
Body weight support system	Optional	Optional	Optional
Standard & Safety Norms	ISO 9001, ISO 13485, IEC 60601-1, UL 60601-1, MDD 93/42/EEG: Class I, type B		

Lode B.V.

 Zernikepark 16
9747 AN Groningen
The Netherlands

Tel.: 31(0)50 5712811

Fax: 31(0)50 5716746

 Distributed by: **Autorizovaný obchodní a servisní partner:**


COMPEK MEDICAL SERVICES, s.r.o.
17. listopadu 861, 506 01 Jičín
mobil: + 420 605 281 433
tel./fax: + 420 493 524 534
e-mail: info@compek.cz
internet: www.compek.cz

COMPEK MEDICAL SERVICES, s.r.o.
Strážna 11, 831 01 Bratislava
mobil: + 421 908 758 793
fax: + 421 2 3301 6145
e-mail: info@compek.sk
internet: www.compek.sk



ISO 9001 and ISO 13485 certified

e-mail: ask@lode.nl

http://www.lode.nl